MAIN TECHNICAL FEATURES M60 ST/CB

SWEEPING WIDTH

• with central roll-brush only	1300 mm
with central roll-brush and right-hand side brush	2000 mm
with central roll-brush and 2 side brushes (standard)	2700 mm
with central brush, 2 side brushes and 3rd front brush (opt)	3600 mm

HOPPER AND WATER TANK

Hopper volume	6 m³
Net homologated payload	6000 Kg
Hopper dumping height	1,1m (opt÷2,30m)
Water tank canacity (with ontional water spraying system)	620 I / (ont 1220 I)


ENGINE AND DRIVE SYSTEM


Mercedes diesel engine Tier3 Intercooler - water cooled	110 kW/147 Hp
Driving system	hydrostatic
Maximum speed	42 Km/h
Maximum gradient full load	>20 %

OTHER FEATURES


Turning radius	4430 mm
Steering system	4-wheel power st.
Full load weight (without/with 3rd front extendable brush)	13250/13400 Kg

M60 ST/CB are also available with EURO 5 (soon EURO 6) EMISSION STANDARDS installing Mercedes diesel engine Intercooler Euro5 AdBlue® water-cooled - 130 kW / 177 HP.

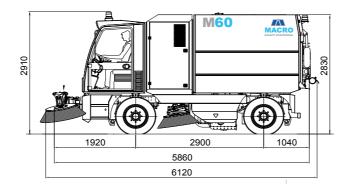





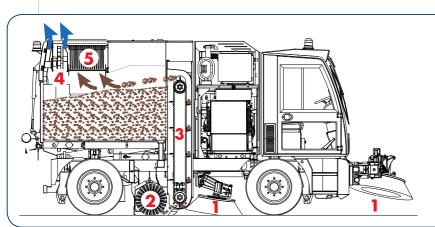

MECHANICAL-SUCTION SYSTEM

The waste is collected by the mechanical action of the side (1) and central (2) brushes and the vertical loading conveyor (3). The suction (4) is only aimed at capturing the dust as soon as it's raised up from the floor. The suction is optimized to allow the full suppression of dusts thanks to large surface filter (5).



Established in 1991 Macro has over 20 years experience in heavy-duty and precision steel fabrication and in the manufacturing of cleaning equipment for major international brands. Inheriting Macro

smart machines for major international brands. Inheriting Macro advanced technology along with RCM large world-wide organization, Macroclean aims at becoming soon the leading manufacturer of heavy-duty industrial and street sweepers.

06/2015 REV.2

MACROCLEAN S.r.l. ph. +39 0523 248636 www.macroclean.it info@macroclean.it Operational Headquarter: Via Bonati 38, 29017 Fiorenzuola D'Arda (PC) - Registered Head Office: Via Tiraboschi 4, Casinalbo (Mo) - Italy



M60

THE TRUE **EVOLUTION IN HEAVY-DUTY SWEEPING**





Effective washing device of loading

conveyor's ring gears

Large-surface retention dust filter

for dust-free sweeping

Machine balance always parallel

to ground, also while sweeping

4-wheels power streering for sharp turning radius

Powerfull and quiet

suction turbine

Semi-centralized greasing

system supplied as standard

"Load Sensing" hydraulic system (CB)

Advanced CanBus control unit

for unmatched performances (CB)

Tilting cab for full access

to most components

Central drive for perfect visibility

in all situations

180° right/left-hand side front

adiustable brush

for reducing fuel consumption

M60

M60

The M60 is the most advanced and performing mechanical-suction sweeper on the market today thanks to years of continuous development. Its 6 cubic meter hopper volume and 6000 Kg net payload are unmatched performances that allow this superb sweeper to work in the heaviest-duty conditions, both urban and industrial. The very large surface filters make the machine work dust-free even in the dustiest situations. To the well-known and appreciated characteristics and reliability of the ST version, the CanBus (CB) version adds further unparalleled and innovative performances.

IT IS AN ADVANCED SYSTEM THAT CONNECTS ALL THE MODULES WORKING THROU-GHOUT THE MACHINE SO THAT THEY CAN WORK TOGETHER TO RUN EFFECTIVELY AND EFFICIENTLY. IT IS HIGHLY RELIABLE AS COMING FROM THE AUTOMOTIVE SECTOR:

- USER-FRIENDLY KEYPAD "EASYSTART" ONE-BUTTON FOR ALL REQUIRED FUNCTIONS ON/OFF
- FRONT/REAR HYDRO-PNEUMATIC "REACTIVE" SUSPEN-SIONS MACRO LAC® PATENT
- BRUSHES GROUND PRESSURE PNEUMATIC CONTROL, FOR WEAR REDUCTION
- AUTOMATIC CENTRAL AND SIDE BRUSHES RAISE AND WATER SHUT-OFF IN REVERSE
- POSSIBILITY OF AUTOMATIC VACUUM ADJUSTMENT
- CONSUMPTION AND SERVICE COSTS
- HIGH-PRECISION WEIGHING DEVICE OF LOADED MATERIAL, AND LOAD LIMITING DEVICE
- IN-CAB MONITOR WITH PARTIAL/TOTAL HOUR-COUNTER OF ALL MACHINE FUNCTIONS
 DIAGNOSTICS DIRECTLY DISPLAYED ON MONITOR
- REMOTE UPDATE OF ANY POSSIBLE SETTING VIA SIMPLE USB STICK OR NETWORK CABLE
- USER AND PARTS MANUALS SUPPLIED CAN ALSO BE CONSULTED
- DEPENDING ON THE TYPE OF WORK
 ON MONITOR
 "LOAD SENSING" HYDRAULIC SYSTEM FOR REDUCING FUEL ACQUISITION, DISPLAY AND RECORDING OF ANY OPERATION DATA



Very large volumes of dry collected waste. 6 m³ hopper and 6000 kg payload is the highest capacity on the market, allowing long



Sweeping and climbing over 20% full-load. The 4-wheel steering gives the M60 excellent manoevrability in all working conditions.



Exclusive capability to sweep in unbalanced conditions (ex. sidewalks). The system allows to sweep on bumps with no operator's action



Spacious and comfortable cabin with 3 homologated seats and user-friendly controls.



Easy-to-use keypads to operate the machine. "EasyStart" single button for all required functions on/off (CB).



Large retention dust filter to work dust-free in any situation, with filtration level available up

MAIN OPTIONALS

Front/rear very comfortable suspensions (ST hydraulic / CB hydro-pneumatic)



Fully adjustable third front brush that allows to sweep 180° left and right side.



Dumping at any height between 1,1 and

Brush pressure control (ST mechanical/

CB pneumatic) to reduce brush consumption



Single accelerator pedal

for both transfer and working mode

Rear powerful wandering vacuum hose, 6 m lenght -140 mm diameter.



Side brush dust suppression skirts for dry dust-free sweeping.